



# BETH

## FUSES (ZE-800)


### ZE-800

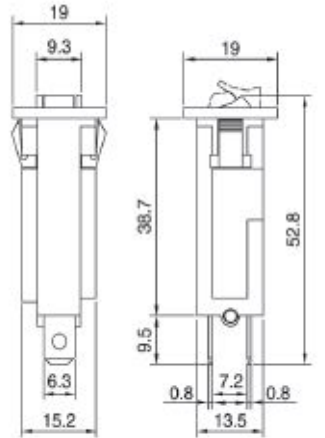

Dimension in mm



### Recommended panel cutouts



### Approval


- \* Approval: 2-18 A 125/250 VAC
- \* Approval: 3-15 A 125 VAC
- \* Approval: 2-15 A 125/250 VAC

### Specifications

- \* Standard Rating: 1.5-20 AMPER.
- \* Input Power: 125 VAC/250 VAC/32 VDC.
- \* Dielectric Strength: 1500 VAC / 1 Minute.
- \* Interrupt Capacity: 125 VAC×1000 A, 250 VAC×200 A.
- \* Insulation Resistance: > 100 MΩ
- \* Calibration: 25°C-105°C of Rated Current-Continuously Carried.
  - 25°C-Between 101% to 134%-May Trip or Not.
  - 25°C-135% of Rated Current-Trip Within 1 Hour.
  - 25°C-200% of Rated Current-Trip Within 1 Minute.
- \* Contact Endurance:
  - 125 VAC×150% of Rated Current-500 Cycles.
- \* Reset: Manual Push Reset/Auto Reset.

### Trip Time Curve

Interrupting characteristics @+25°C

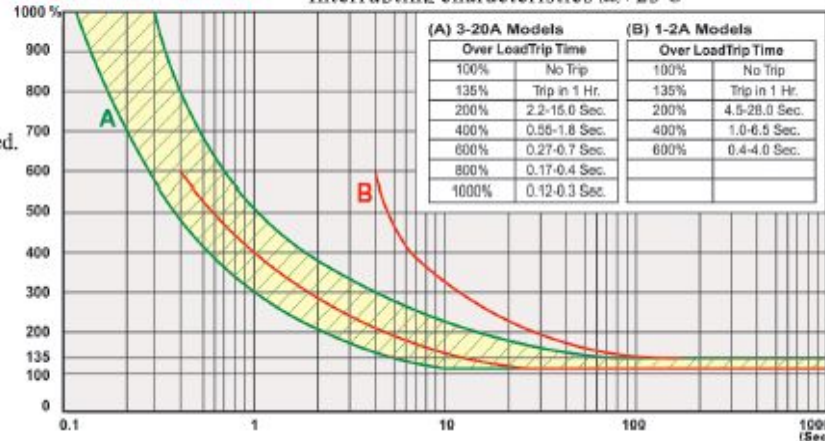

| MAX. Internal Resistance |         |
|--------------------------|---------|
| 1.5A-2A                  | 0.150 Ω |
| 2.5A-3A                  | 0.120 Ω |
| 3A-4A                    | 0.080 Ω |
| 4A-5A                    | 0.040 Ω |
| 5A-6A                    | 0.025 Ω |
| 6A-7A                    | 0.020 Ω |
| 8A-9A                    | 0.016 Ω |
| 10A-11A                  | 0.012 Ω |
| 12A-13A                  | 0.010 Ω |
| 14A-16A                  | 0.008 Ω |
| 18A-20A                  | 0.006 Ω |